



HVF Drum Fan



HVF-60LA(24")/65LA(26")/75LA(30")





HVF-90LA(36")/105LA(42")



Wall-mounted oscillating type
Up-Down adjustable: 0°/15°/30°/45°

Features

- 100% Copper motor, $\leq 50K$ temperature-rise.
- Wide aluminum blade, comfortable wind;
- Re-settable thermal protector;
- Big airflow, low noise, long life;
- 5000 hours continuously running;
- 2 or 3 speeds, 360° adjustable blowing angles for ground fan;
- Ground or wall oscillation type for options.

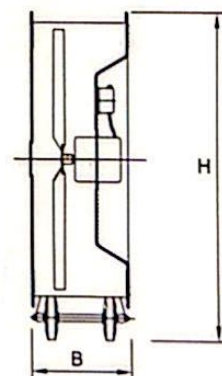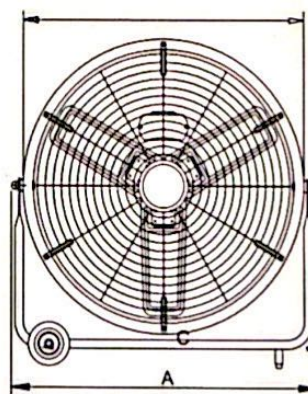

Specification & Outline Dimensions

Model	Diameter of blade (mm)	A / B / C / H Outline dimensions (mm)	Voltage & frequency	Speed	Power (W)	Speed (pm)	Air volume (CFM)	Noise (dB)
HVF-60LA	600/24"	775/280/663/770	220-240V~50/60Hz	Low	140	800	6141	60
				Medium	150	920	7411	65
				High	160	1050	8118	70
HVF-65LA	650/26"	815/280/708/810	220-240V~50/60Hz	Low	165	850	5047	55
				Medium	190	950	6141	60
				High	230	1100	7765	65
HVF-75LA	750/30"	900/280/808/920	220-240V~50/60Hz	Low	215	850	7552	58
				Medium	240	950	9529	67
				High	280	1100	10658	68
HVF-90LA	900/36"	1085/465/960/1085	220-240V~50/60Hz	Low	520	850	12353	65
HVF-90EA		1060/480/980/1040		High	650	1050	16235	75
HVF-105LA	1050/42"	1268/465/1114/1230	220-240V~50/60Hz	Low	620	850	14470	65
HVF-105EA		1230/480/1120/1160		High	750	1050	19059	75

EXPERT IN FANS



intertek