

RMUA Make Up Air Fan

(ROOF & WALL EXHAUST FANS)



RMUA is suitable for roof or wall installations for commercial ventilation applications. They are the perfect low-cost option for areas with little or no plumbing

APPLICATIONS



General ventilation



Mechanical room air supply



warehouse air supply







ACCESSORIES / OPTIONS

- Gravity & motorized dampers
- Wall mount brackets
- Roof curb

Main Features With RMD Series

- Suitable for roof or wall mounting
- Axial impellers constructed with die formed blades riveted to a steel hub
- Spun aluminum housing for weather-resistant durability
- Wire conduit provides a clear channel for electrical connections
- Bird screen
- Totally enclosed, permanently lubricated, ball bearing motor
- Disconnect switch
- 110 F max. temperature rating
- 110-120V/60Hz or 220-240V 50Hz-60Hz, single phase
- Diameters range from 10" to 18"
- Direct drive capacities to 2,400 cfm (4080CMH)


Product three-dimensional diagram display

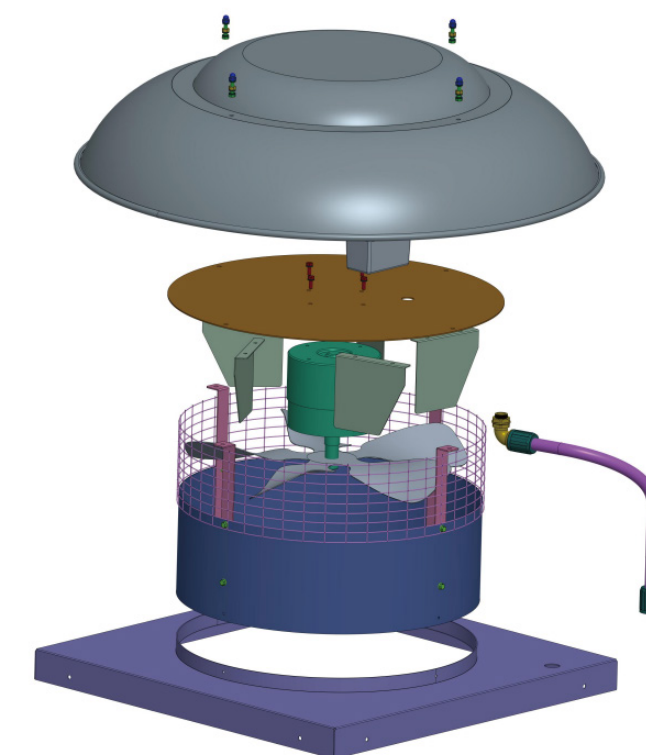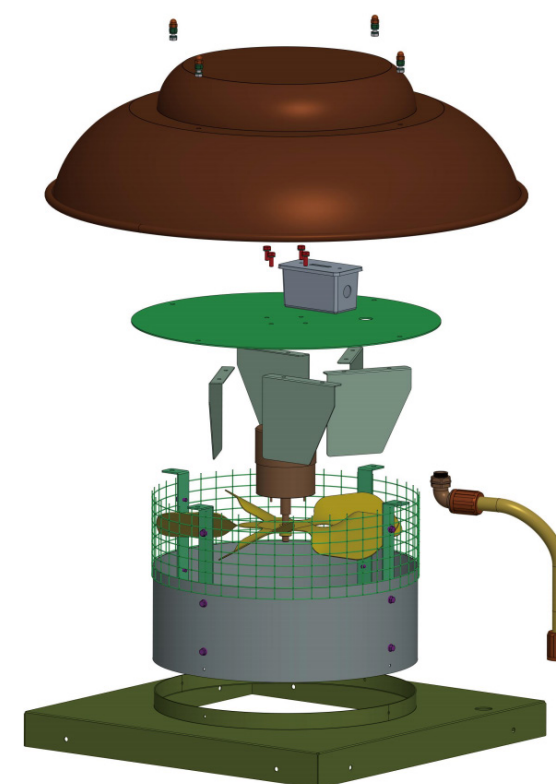

Product Size


MODEL	DIMENSIONS IN INCHES*							WT (LBS)	DAMPER SQUARE
	HT	W	B	C	D	E	RO		
RMUA -14	12.6 (320mm)	27.3	2	21	19.5	12	16	45	15
RMUA -18	14.4 (365.7mm)	33.6	2	26	24.5	12	20	67	19

RMUA-14

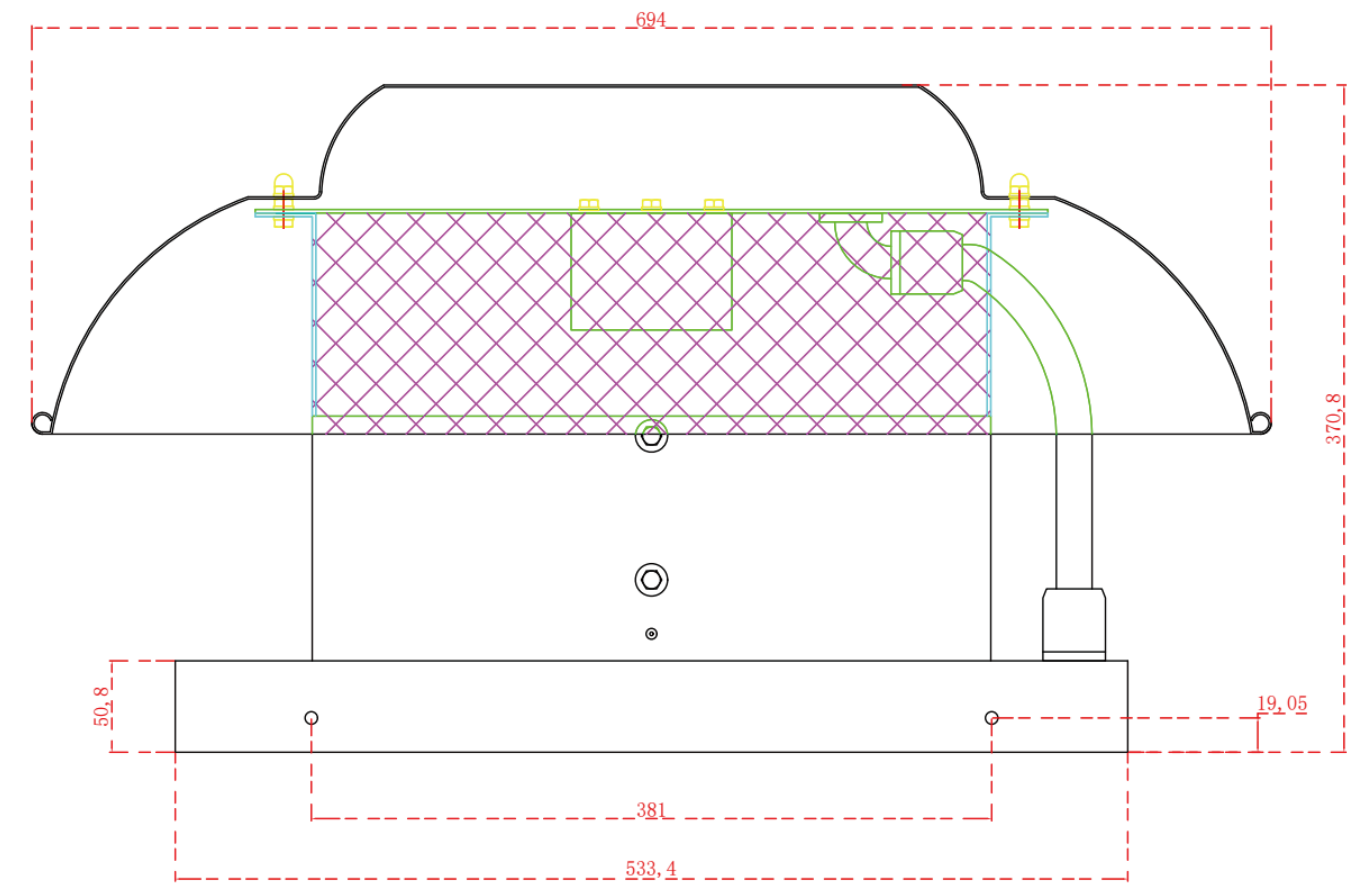

MODEL	RPM	MTR HP	FLA	AIRFLOW PERFORMANCE (CFM)							
				0" SP	0.125" SP	0.25" SP	0.375" SP	0.50" SP	0.625" SP	0.75" SP	0.875" SP
RMUA-14	1100	1/6	2.2	1160	899	786	646	521	384	236	-

RMUA-18

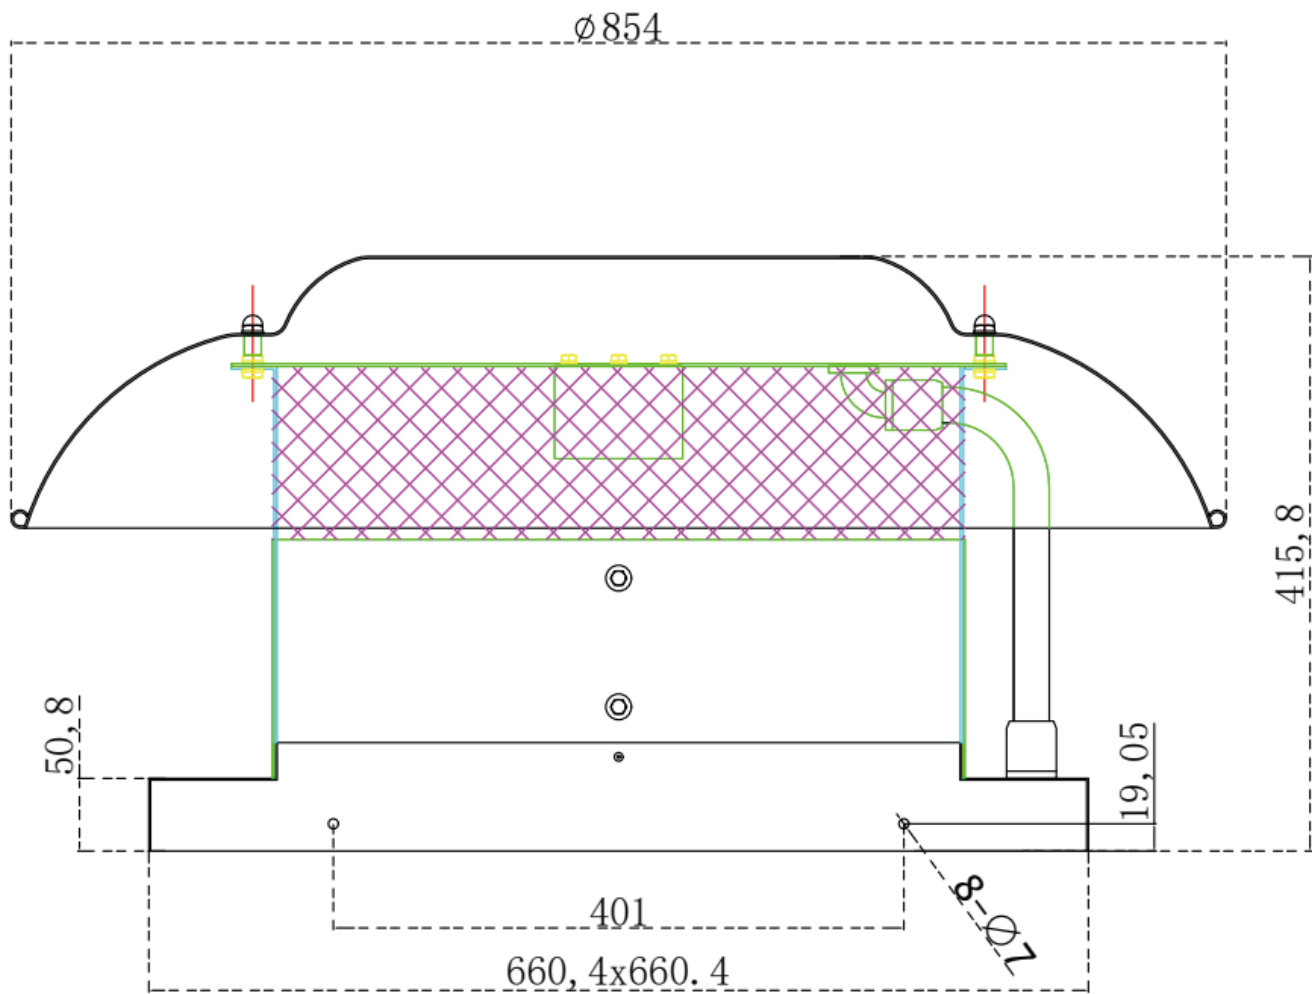

MODEL	RPM	MTR HP	FLA	AIRFLOW PERFORMANCE (CFM)							
				0" SP	0.125" SP	0.25" SP	0.375" SP	0.50" SP	0.625" SP	0.75" SP	0.875" SP
RMUA-18	1100	1/3	4.5	2400	2034	1628	1491	1293	1084	881	662